



250B/6SA DUAL PLATING SYSTEM UPGRADE

- Extends the frequency range of two SC-6SA Plating Systems¹ to 200 MHz
- Precision plating to load resonant frequency using “Measured FL” method
- Increases frequency accuracy
- No physical capacitor is required
- Uses existing filaments and crystal wheels
- Two Pass plating
- Over 40 different crystal parameter measurements including DLD and Spurious
- Measured parameters checked against user defined QC limits (No ring test required)
- Supports wheels with different number of positions (e.g. 72 or 144)
- Upgrade can be configured for a variety of plating system models
- Each 6SA system runs independently



¹ SC-6SA is a trademark of Showa Shinku Corporation, Japan

SPECIFICATIONS

Frequency Range :	1 MHz - 200 MHz
Plating Performance :	+/-2 ppm at series, typical *
Network Analyzer :	250B-1

* Proprietary measurement and calibration algorithms provide correlation to industry standard crystal measurement equipment.


SAUNDERS & ASSOCIATES, INC.

2520 E. Rose Garden Lane - Phoenix, Arizona 85050 USA (602) 971-9977 FAX (602) 971-5522
E-Mail sales@saunders-assoc.com - World Wide Web <http://www.saunders-assoc.com>

SYSTEM CONFIGURATION

- S&A 250B-1 Network Analyzer
- Dual Relay Assembly
- Two 6SA Vacuum Feedthru Assemblies
- *Windows*[®] System Software
- S&A PCI TTL I/O Card
- Two IEC-444 PI Networks
- Computer Requirement:
Minimum 500 MHz Pentium III,
full PCI slot with +5V & 3.3V power

SCREEN FORMAT

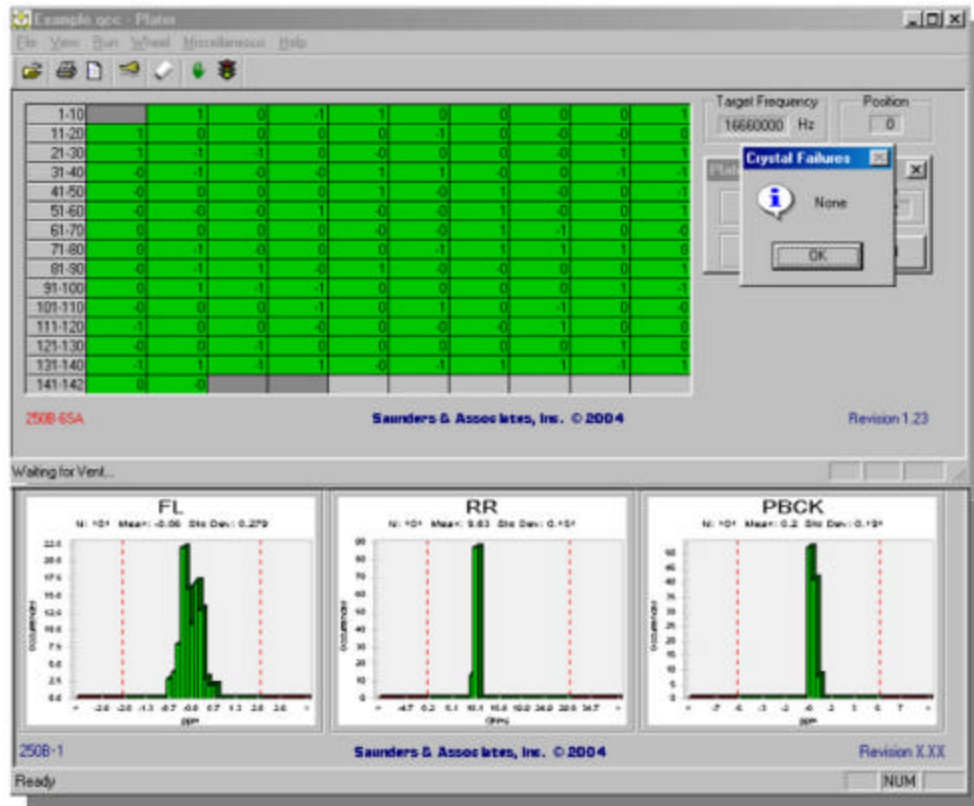

SAUNDERS & ASSOCIATES, INC.